

FIG. 3 is a perspective view of the barcode scanner 100 in a scanning position. The scanner 100 includes a housing 110, a display 120, a camera 130, and a barcode reader 140. The scanner 100 is shown scanning a barcode 125 on a shelf 120. The scanner 100 is connected to a computer 360 via a cable 340. The scanner 100 is also connected to a power source 300 via a cable 300'. The scanner 100 is shown in a scanning position, with the camera 130 and barcode reader 140 aligned with the barcode 125.

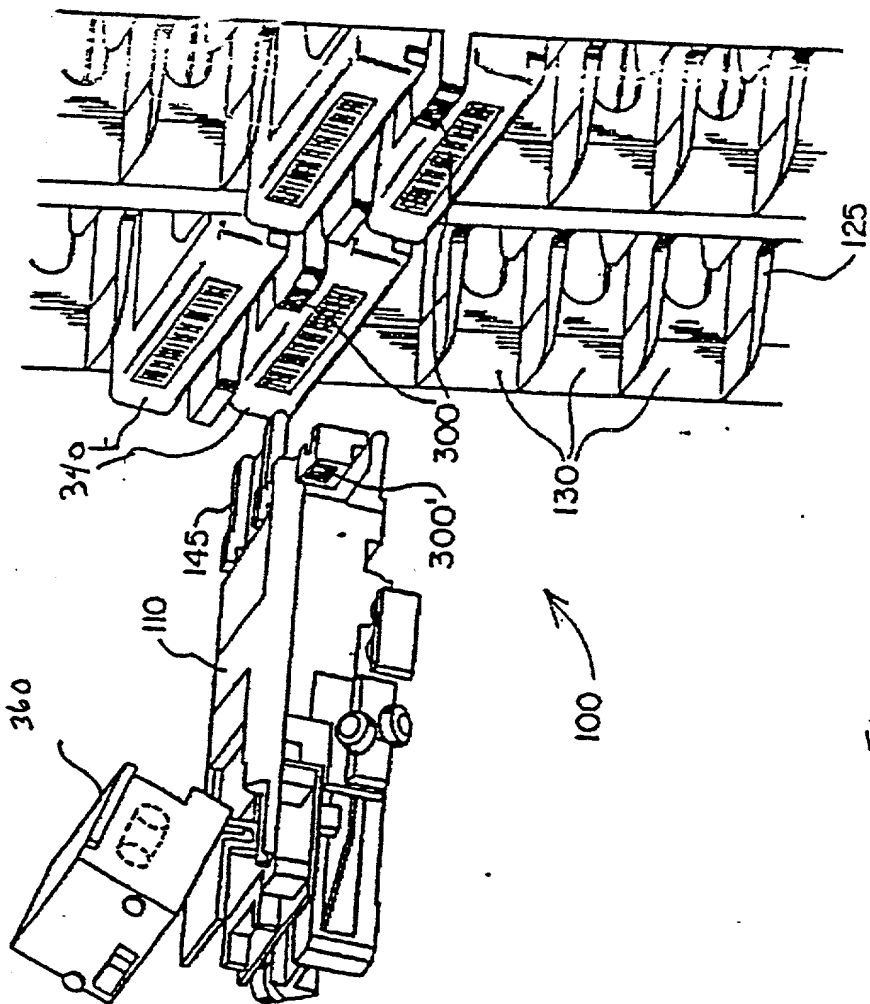


Figure 3

Mehlig et al.  
2001-067-TAP  
Barcode Single Laser  
Scanner Targeting  
Page 2 of 7

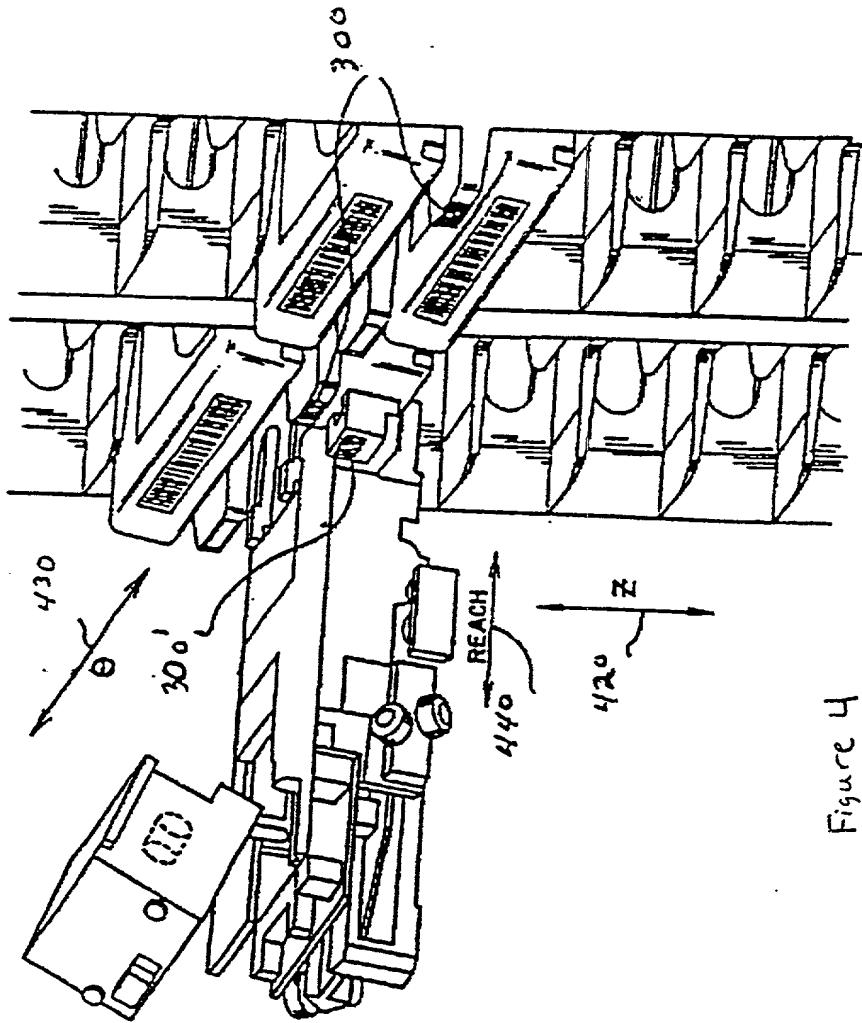


Figure 4  
 Mehlig et al.  
 2001-067-TAP  
 Barcode Single Laser  
 Scanner Targeting  
 Page 3 of 7



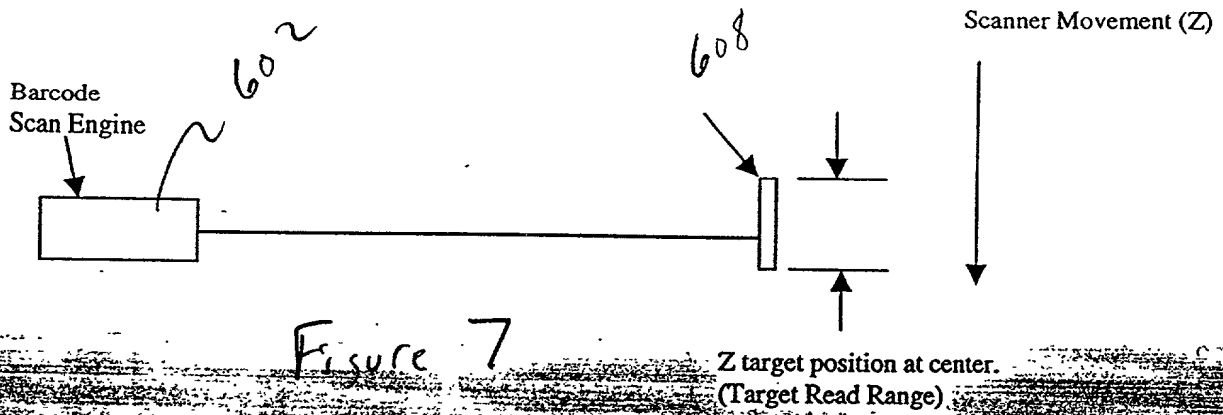


Figure 7

SIDE VIEW

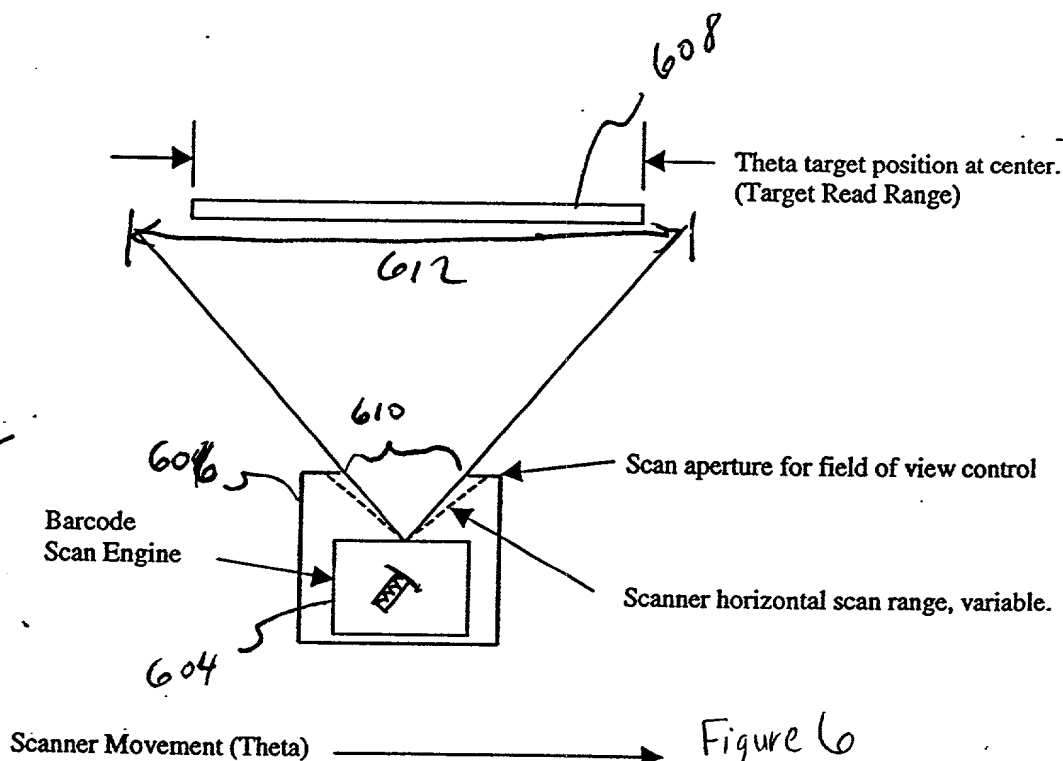


Figure 6  
TOP VIEW




Figure 8

Mehlberg et al.  
2001-067-TAP  
Barcode Single Laser  
Scanner Targeting  
Page 6 of 7

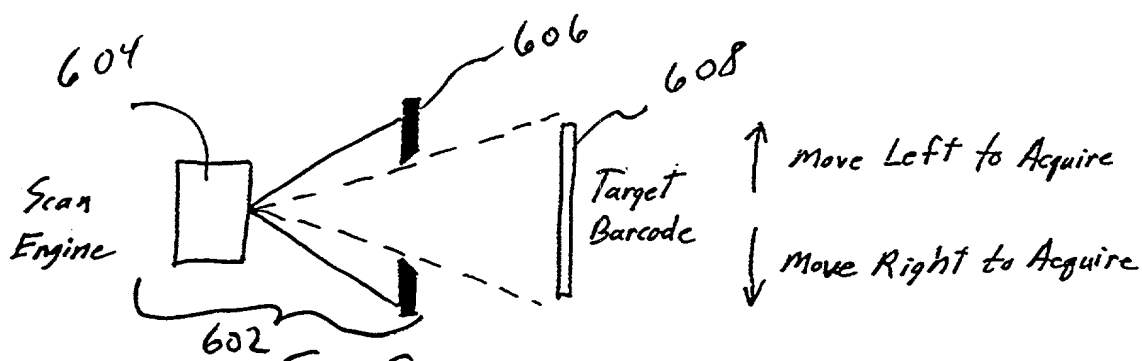


Figure 9  
 Mehlberg et al.  
 2001-067-TAP  
 Barcode Single Laser  
 Scanner Targeting  
 Page 7 of 7

TOP VIEW